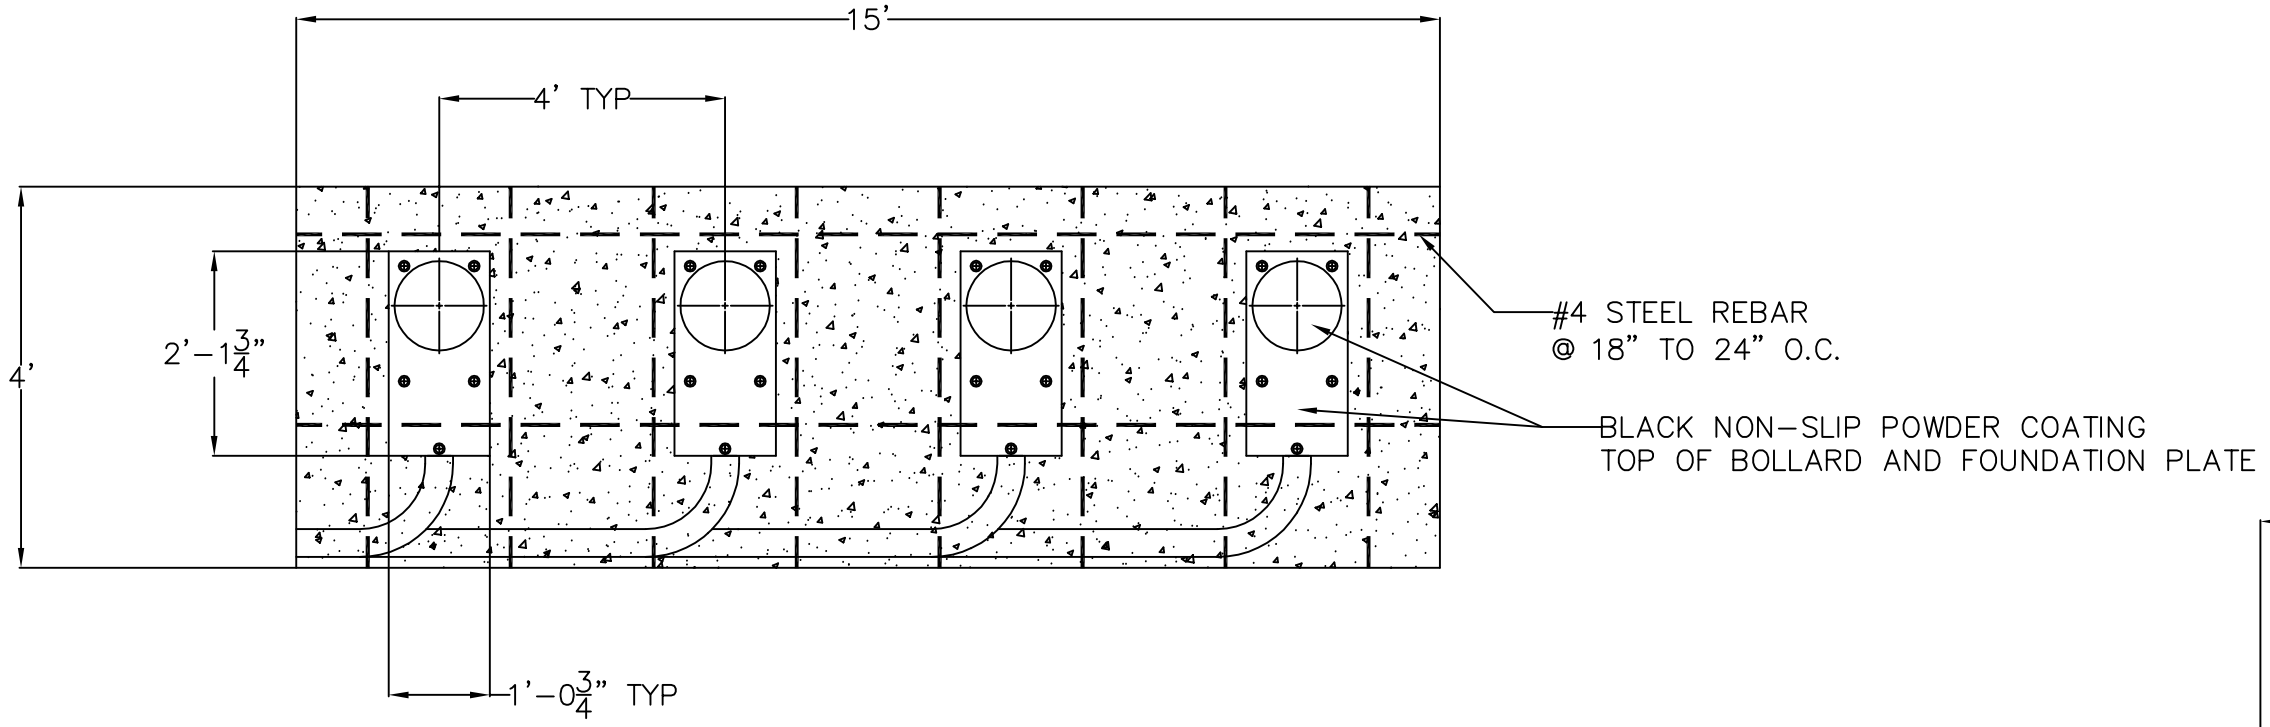

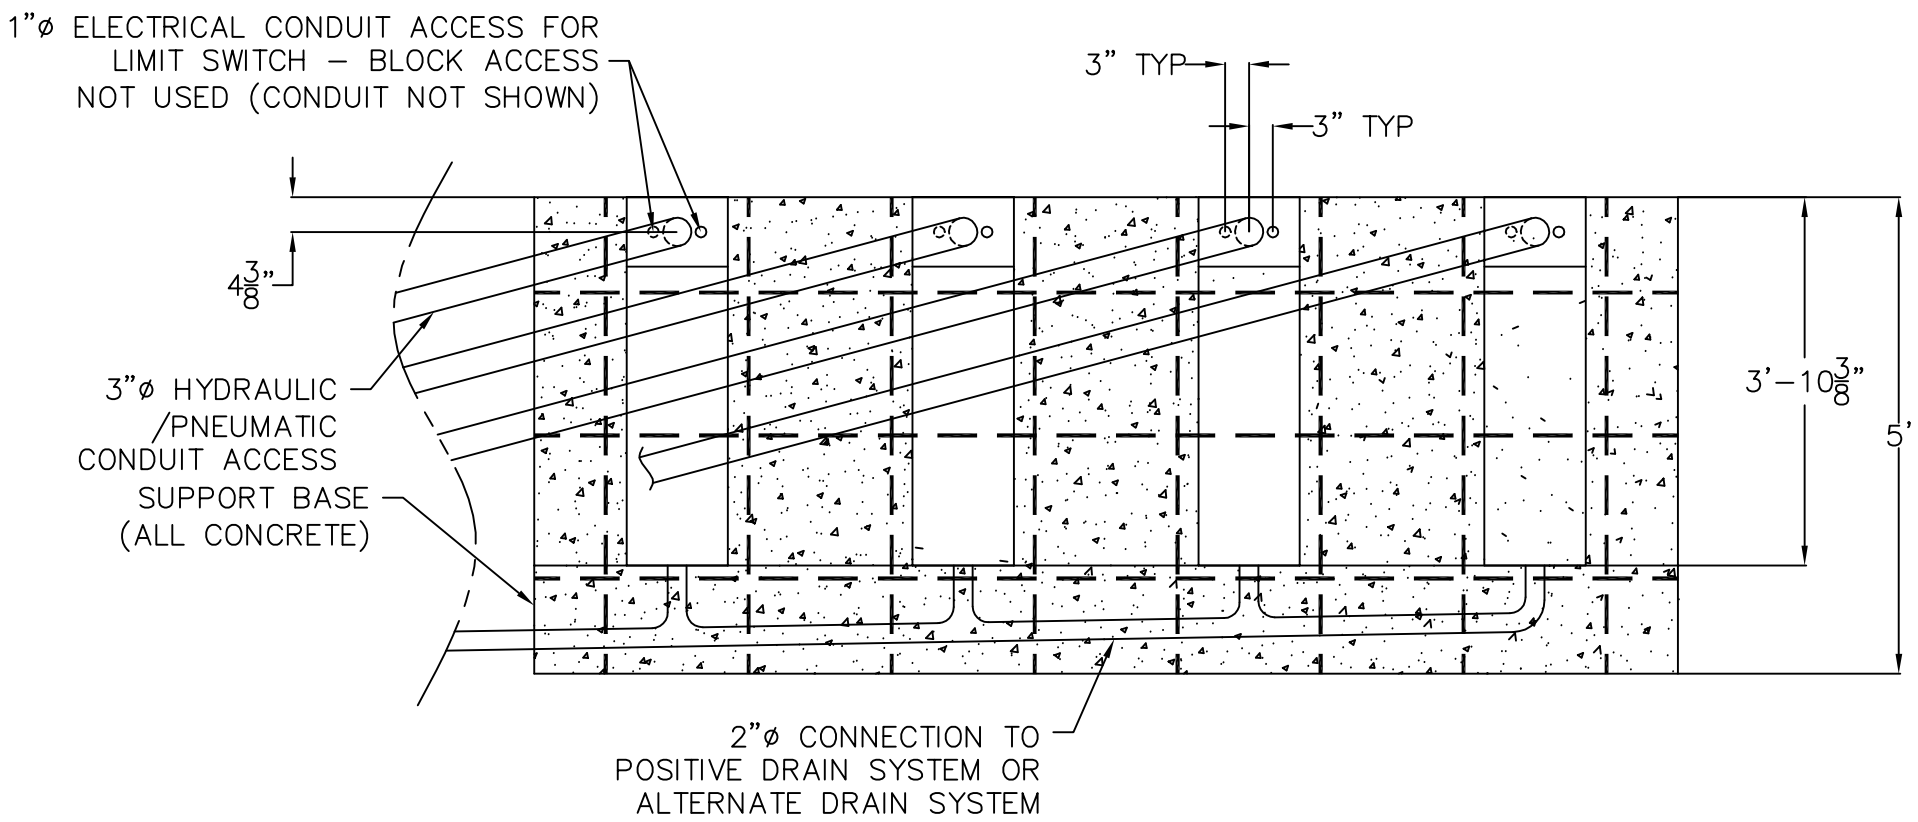

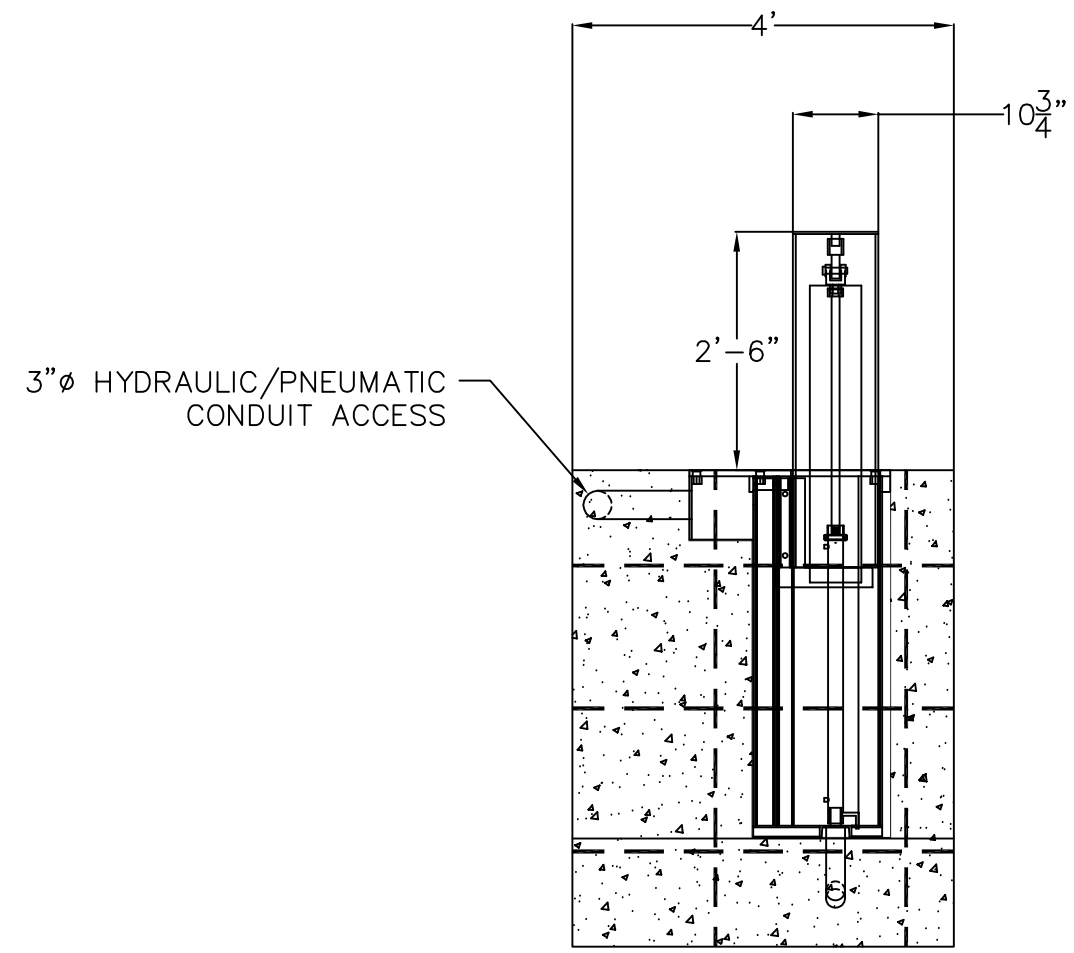

NOTES:

1. CONCRETE TO BE 3000 PSI MINIMUM.
2. #4 STEEL REBAR TO BE PLACED IN POUR @ 18" TO 24" O.C. PER ACI CODE.
3. HYDRAULIC AND ELECTRICAL CONDUIT RUN TO HPU.
4. SLEEVE FOR HYDRAULIC HOSE MUST BE PVC/ELEC TYPE CONDUIT & FITTINGS WITH LARGE SWEEPING RADIUS.
5. ALTERNATE DRAIN SYSTEMS MAY BE FRENCH DRAIN OR SUMP PUMP.
6. PRIMARY CASING MUST BE SUPPORTED TOP, AND BOTTOM TO MAINTAIN TOLERANCES DURING CONCRETE POUR. EACH BOLLARD IS THEN INSERTED INTO THE CASING AFTER CONCRETE CURES.

REV. NO.	DESCRIPTION	REV. DATE

TITLE

FOUNDATION DRAWING - SET OF FOUR

NORSHIELD SECURITY PRODUCTS
3224 Mobile Hwy. ● Montgomery, AL 36108-4400
Tel: 334-281-8440 ● Fax: 334-286-4320
Website: www.norshieldsecurity.com

DRAWN BY	SS
DATE	08-15-05
MODEL NUMBER	NSS30
OLD MODEL NUMBER	BAHS1030
SHEET	01 OF 03

TOLERANCE ± 1/32" UNLESS OTHERWISE NOTED

DRAWING NUMBER 300141